


FIGURE 912.4A

Sign Specifications for Fire Department Connections

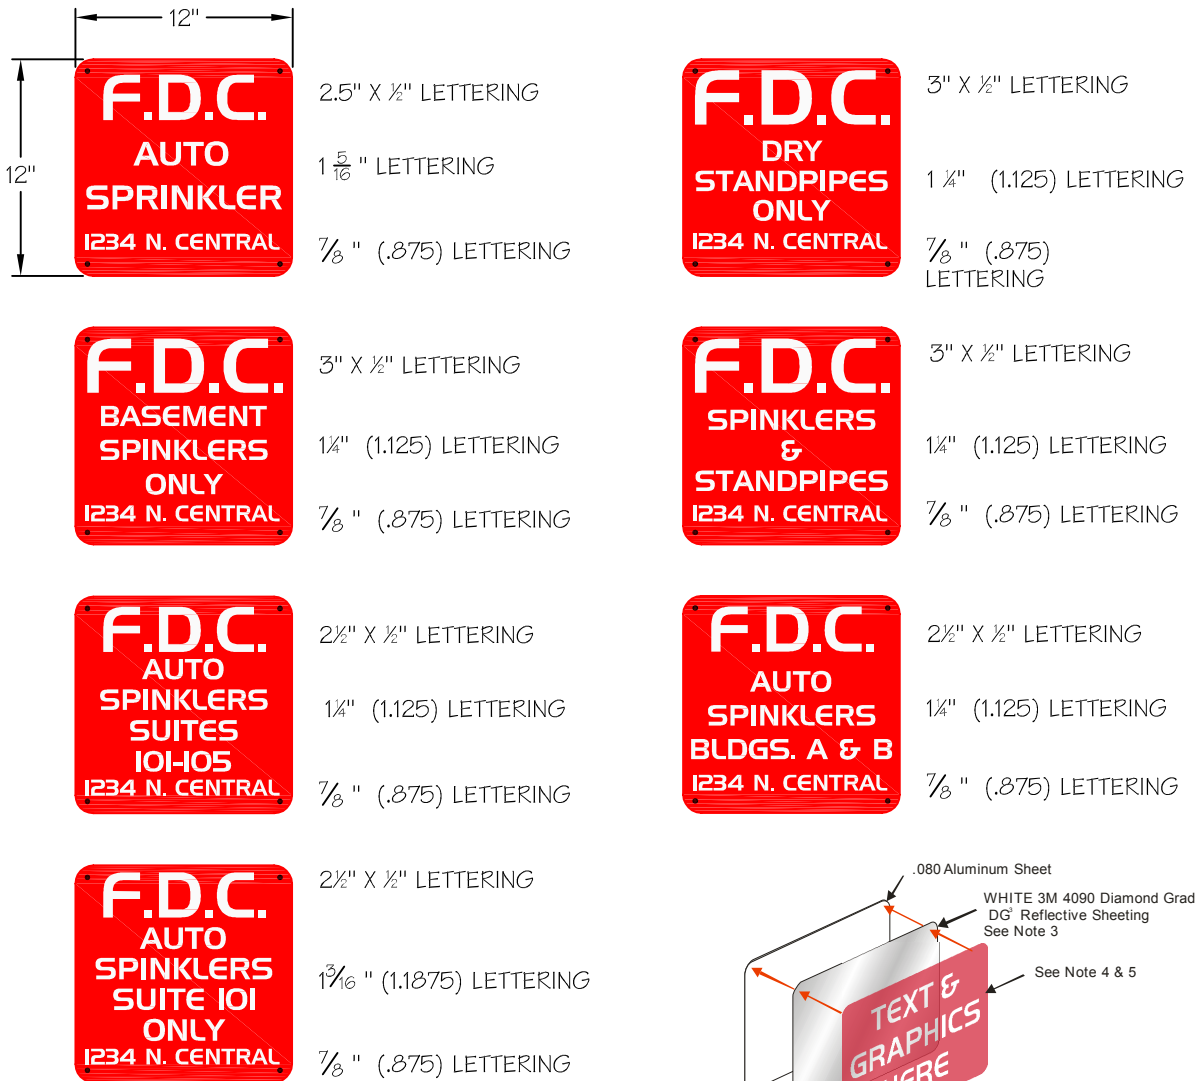

F.D.C. SIGN SPECIFICATIONS

NOTES:

1. THE SIGN FACE SHALL BE 12" X 12" AND FABRICATED FROM .080 ALUMINUM SHEET WITH 1/2" RADIUS CORNERS.
2. FONT STYLE USED IS HANDEL GOTHIC BT CAPITAL FONTS
3. THE SIGN FACE SHALL HAVE A WHITE 3M DIAMOND GRADE REFLECTIVE SHEETING (DG³ 4090 SERIES OR EQUIVALENT) APPLIED AS A BACKGROUND TO THE ALUMINUM PLATES.
4. LETTERING / GRAPHICS SHALL BE DONE ONE OF THE FOLLOWING WAYS:
 - A. 3M SCOTCHLITE ACRYLIC, TRANSPARENT, ELECTRONIC CUTTABLE FILM, (RED 1172 SERIES) INVERSE CUT TO ALLOW WHITE REFLECTIVE BACKGROUND TO SHOW THROUGH.
5. ALL SIGN IMAGING SHALL BE IN COMPLIANCE WITH THE REFLECTIVE SHEETING MANUFACTURES MATCH COMPONENT SYSTEM.
6. TO BE INSTALLED ON THE WALL 7 FEET ABOVE GRADE OVER F.D.C. VALVE.
7. REQUIRES PRE-APPROVAL BY FIRE PREVENTION EMERGENCY ACCESS OFFICER.