


SPEED CUSHIONS SPECIFICATIONS

DRAWINGS NOT TO SCALE

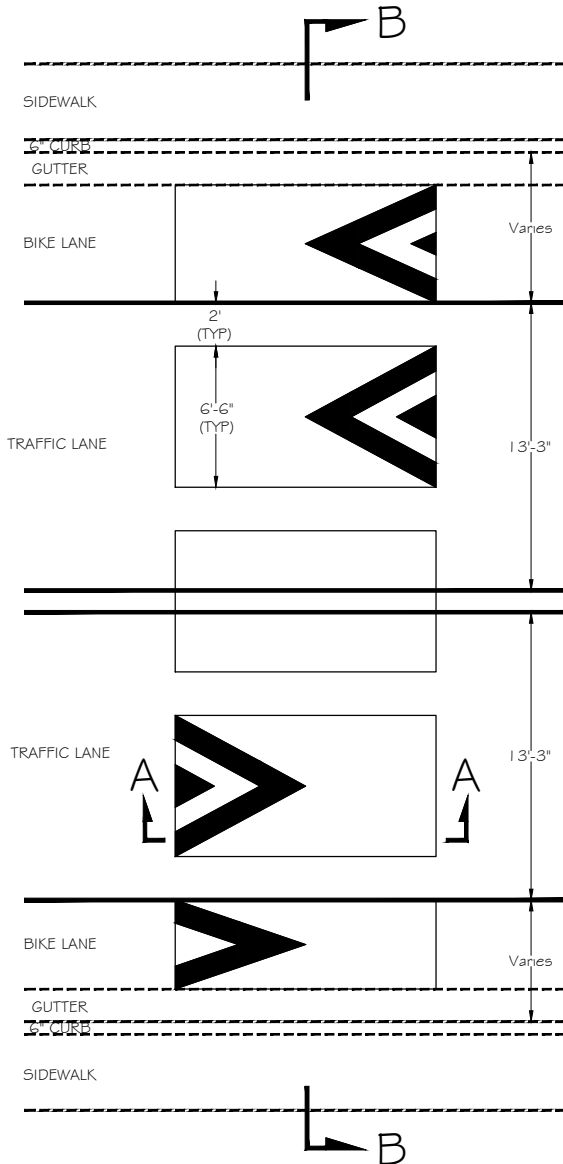

NOTES:

NO WORK SHALL COMMENCE WITHOUT AN INSPECTOR BEING PRESENT

1. Speed humps must be placed at locations approved by the Street Transportation Department
2. Speed humps shall not be placed over manholes, watergates, junction chambers, or other irregularities in the roadway.
3. Speed humps shall be constructed with 3/8" hot mix, with not less than 5.5% and not more than 6.0% AC-20. A tack coat shall be applied prior to application of asphalt.
4. Speed humps are to be constructed between 3" and 3-1/2" in height. If constructed outside of this range, contractors will be required to make corrections. Because some settlement is normal, it is preferable initial height be mid-range.
5. Contractor must properly compact humps to preclude excessive settlement.
6. The contractor shall provide verification of cross section dimensions.
7. The contractor shall provide a two year warranty on labor and material. Contractee should request contractor to warrant height to be at least 3" tall after 24 months.

